


Pacific Woodtech Corporation
Design No. PWT/RB 60-01
Rim Board
PWT Rim Board
ASTM E119
Rating: 1 Hour

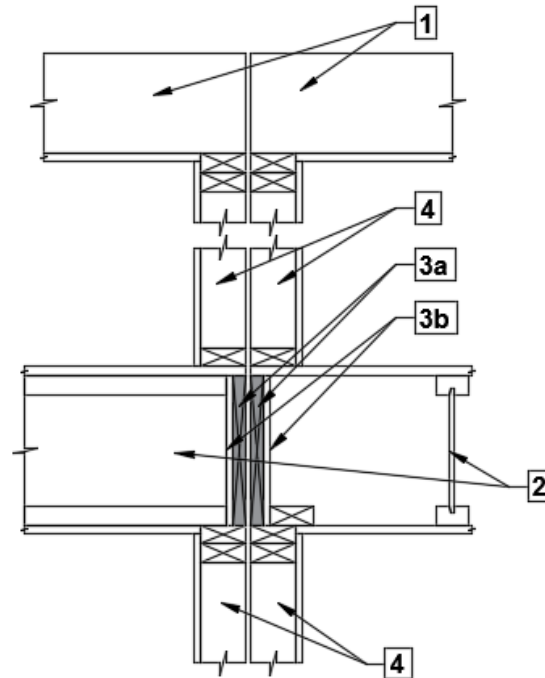

1. UPPER-LEVEL FRAMING: Non-continuous roof/ceiling or floor/ceiling assembly

2. FLOOR/CEILING ASSEMBLY: Unrated, 45 min. rated, or 1-hour rated.

3. RIM BOARD

CERTIFIED PRODUCT: Pacific Woodtech Corporation, PWT Rim Board

A. Min. 1 in. thick PWT Rim Board

B. Direct-applied protection continuous gypsum wallboard attached to rim board with 1-1/2 in. Type W screws at 12 in. on center (oc)

- 5/8 in. Type X at occupancy sides required when item 2. is unrated.
- 1/2 in. conventional at occupancy sides required when item 2. is 45 min. rated.
- Not required when item 2. is 1-hour rated.

4. WALL ASSEMBLY: Min. 1 hour rated.