


SAFTI FIRST
Design Number: SF/CWA 45-01
Safti First Wall Assembly System
ASTM E119-08, UL 263-03, NFPA 251-06, CAN/ULC S101-04
Assembly Rating: Up to 45 minutes, Non-Bearing Wall

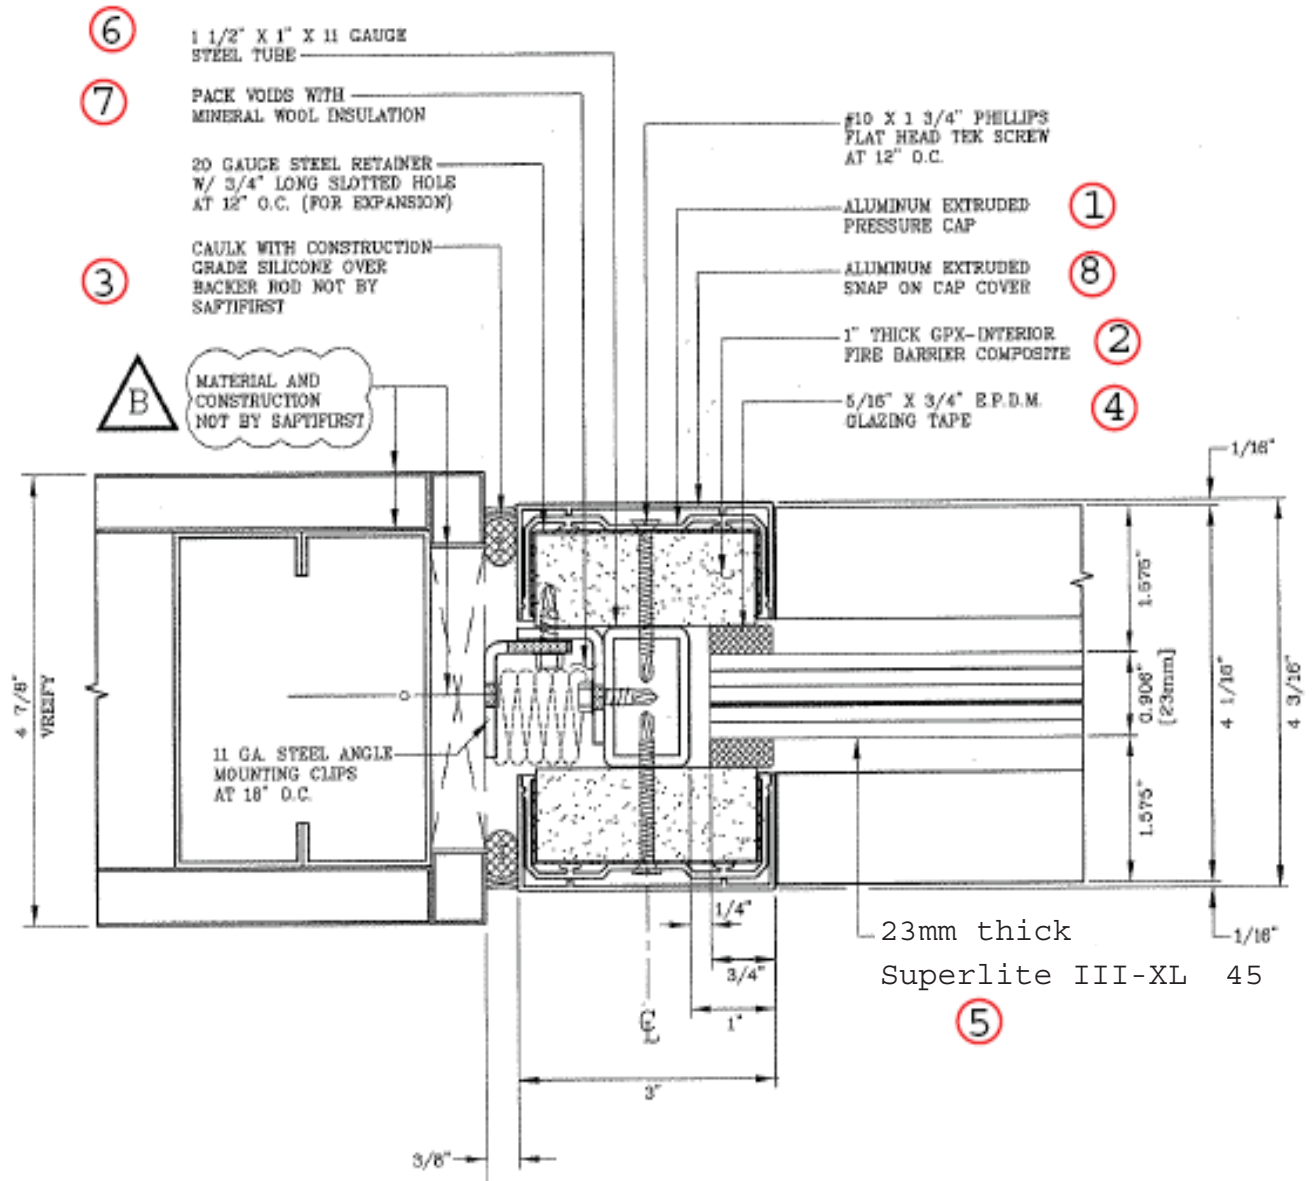

SAFTI FIRST
Design Number: SF/CWA 45-01
Safti First Wall Assembly System
ASTM E119-08, UL 263-03, NFPA 251-06, CAN/ULC S101-04
Assembly Rating: Up to 45 minutes, Non-Bearing Wall

1	Aluminum Extruded Pressure Cap
2	GPX- Interior Fire Barrier Composite
3	Sikaflex sealant or construction grade silicone similar to Dow Corning 795
4	Glazing tape
5	Superlite III-XL 45 Minute glazing
6	1-1/2" x 1" x 11 gauge Steel tube
7	Mineral wool
8	Aluminum Extruded Snap-on cap cover

Superlite III-XL 45 minute Assembly	
Maximum Allowable Clear View Area	6000 sq. in.
Maximum Allowable Clear View Area Width	100"
Maximum Allowable Clear View Area Height	100"
Minimum Stop Depth	5/8"