


A&A Sheet Metal Products, Inc.
Design No. AASM/WDP 120-01
Wall Assembly
FIRE RATED MAGAZINE WALL ASSEMBLY
ASTM E119 and CAN/ULC S101
Fire Resistance Rating: 2 Hour (Exterior Exposure Only)
Maximum Superimposed Load: 644 lb/linear ft

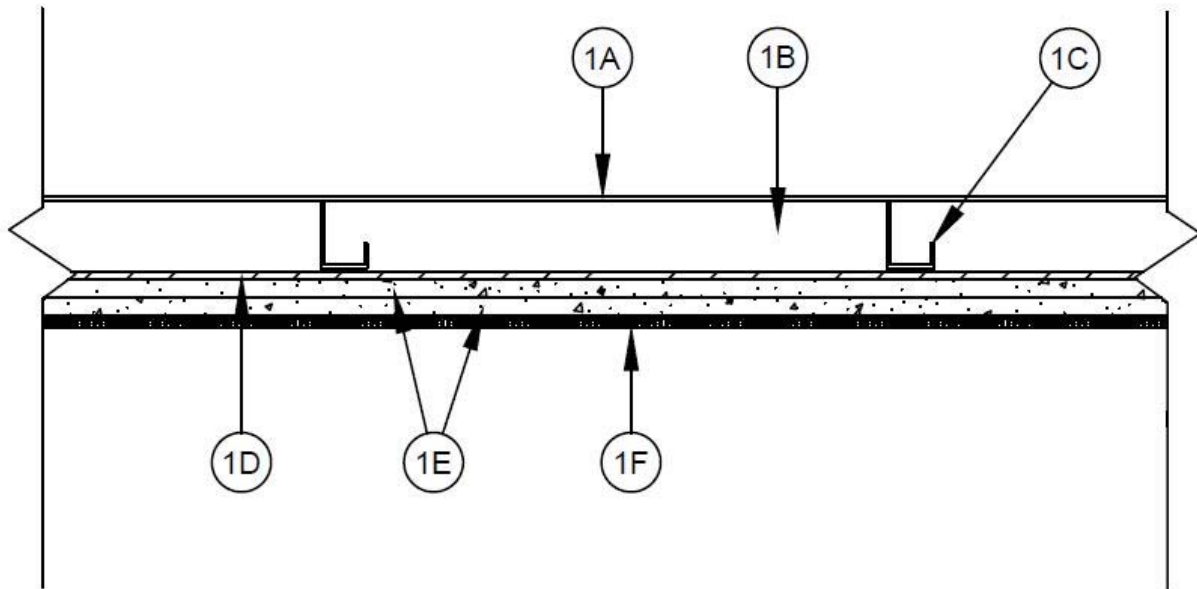

1. **CERTIFIED MANUFACTURER:** A&A Sheet Metal Products, Inc.

CERTIFIED PRODUCT: Wall Assembly

CERTIFIED MODEL: Magazine Wall Assembly

WALL ASSEMBLY: Max. height of 10 ft., factory-fabricated wall assembly consisting of the following components:

- A. EXTERIOR FACE – 10 GA steel (CRS, Galvanneal, or Galvanized Steel)
- B. INSULATION – Un-faced fiberglass insulation

C. J-CHANNELS – Interlocking 10 GA steel (CRS, Galvanneal, or Galvanized Steel)

D. STEEL LINER – 3/8 in. thick steel plate

E. GYPSUM BOARD – Two layers of 3/4 in. thick gypsum board

F. INTERIOR FACE – Min. 1/2 in. thick fire retardant treated plywood; joints covered with 3 in. wide, 1/2 in. thick fire retardant treated plywood