


Wall Design SC/WA120
Wall Design for Installation of Sioux Chief Manufacturing
OX Box Washing Machine Outlet Box

Assembly Rating: 2 Hours Fire Exposure, Non Load Bearing

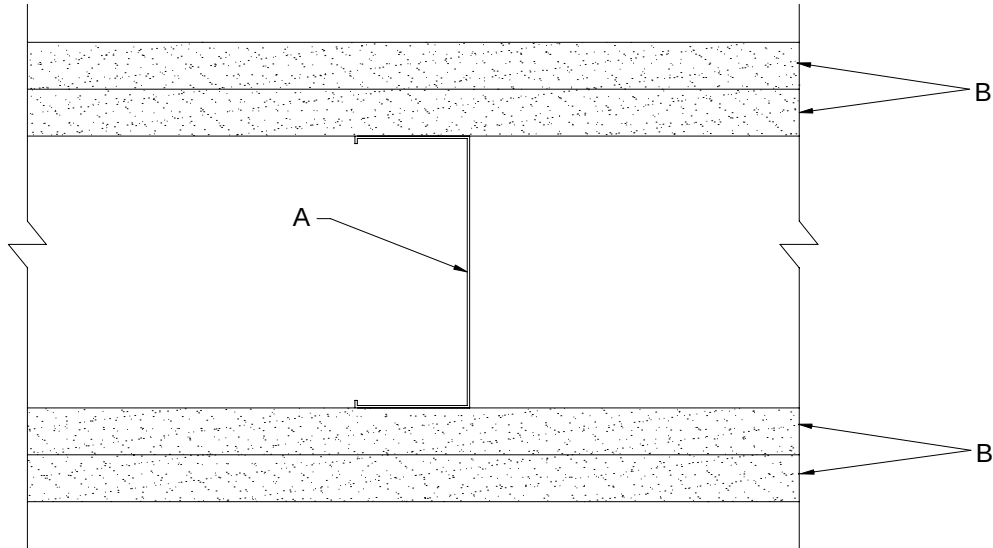

A	Steel Stud Non Load Bearing: 3-5/8" minimum depth x 1-1/4" minimum flange x minimum 20 gauge (0.031" minimum), spaced 16" on center maximum.
B	Base Layer: 5/8" listed type X gypsum wallboard applied to the steel studs with 1" Type S drywall screws 24" on center maximum. Face Layer: 5/8" listed type X gypsum wallboard applied to the steel studs with 1-5/8" Type S drywall screws 12" on center maximum. Joints offset 16" on center from base layer.

Wall Section Showing Installation in the Wall

