


#10 x 1 in., self-drilling, zinc coated screws, spaced at maximum 24 in. on centre

Proprietary 8 ft. long, 6 in. wide x 3/4 in. high x 0.138 in. thick QC Facades hat tracks.

#12 x 1 in. hex washer head, self-drilling screws installed through the flanges of the hat tracks into the sub-wall structure.

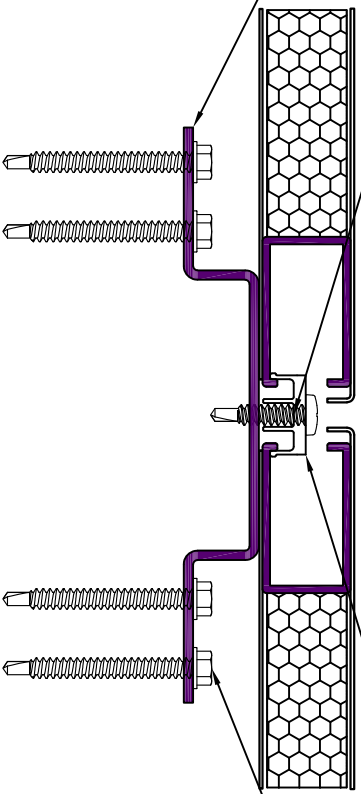

#10 x 1 in., self-drilling, zinc coated screws, spaced at maximum 24 in. on centre

1-7/8 in. x 1/4 in., aluminum profile

Proprietary 8 ft. long, 6 in. wide x 3/4 in. high x 0.138 in. thick QC Facades hat tracks.

#12 x 1 in. hex washer head, self-drilling screws, installed through the flanges of the hat tracks into the sub-wall structure.

