


Parklex Prodema USA, Inc.
Design No. PUI/CWP 25-01
Non-Load Bearing Wall System
NATURCLAD-W F Exterior Siding Panels
CAN/ULC S134
Rating: Meets Conditions of Acceptance

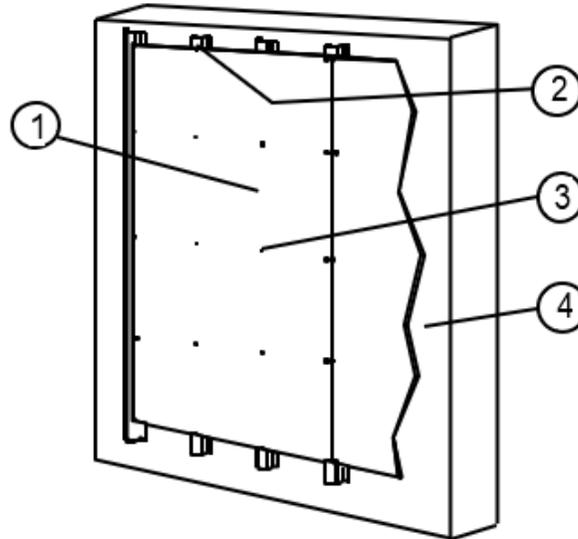

1. CERTIFIED MANUFACTURER: Parklex Prodema USA, Inc.

CERTIFIED PRODUCT: NATURCLAD-W F Wall System

EXTERIOR SIDING PANELS: NATURCLAD-W F panel is a stratified high-density timber panel for internal and external applications. Parklex panels of the following thicknesses are listed: 8mm, 10mm, 12mm, and 14mm. Panels should be installed with approximately 2mm gap between the adjacent panels on all sides. Panels can be installed vertically or horizontally.

2. GALVANIZED STEEL SUPPORTS: 18 GA Grade 33 galvanized steel hat channels installed vertically at 16 in. (406mm) on center (oc) spacing, 25mm min. depth.

3. SELF-DRILLING SCREWS: #12x18mm min. stainless steel self-drilling screws, used at 24 in. (61cm) oc min. spacing.

4. WALL SURFACE SUBSTRATE: NATURCLAD-W F panels are listed for installation over the following substrates: Exterior Gypsum Sheathing (12mm min.), Fiberglass Sheathed Gypsum Board (12mm min.), Concrete Panels (12mm min.), or Masonry Construction.

Consult the listing report on the Directory of Building Products (<https://bpdirectory.intertek.com>) for the edition of the standard(s) evaluated.

Compliance of the assembly described in this Design Listing with the referenced standard relies on verification that the assembly constructed in the field is consistent with that described herein. Intertek certified products may be verified by the approved Intertek label; other products must be verified by the Authority Having Jurisdiction as meeting the specifications stated herein.