


DESIGN NO. PS/PH 120-06
HORIZONTAL (FLOOR), RATINGS: ASTM-E814 - 2 HRS (F), 2 HRS (T)
TEST PRESSURE DIFFERENTIAL - 2.5 Pa (0.01" OF WATER) MINIMUM

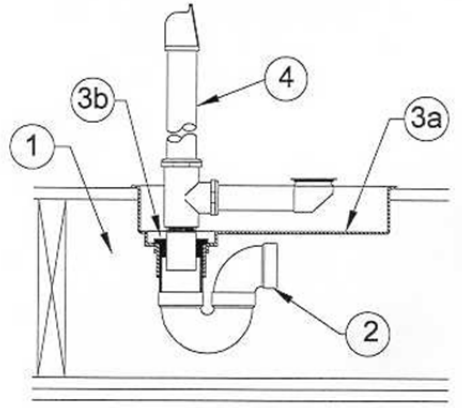

1	Floor: One-hour rated or Two-hour rated wood framed/gypsum wallboard floor/ceiling assembly. F rating is limited to that of the floor/ceiling assembly.
2	Pipe Material & Pipe Support: Maximum 2" diameter Sch. 40 PVC or Cellular core PVC. Branch pipe supported by solvent cementing trap to coupling.
3	Firestop System Components: a. Fire Rated PVC Tub Box*. b. ProSeal Adapter Plug - P25661 for pipe size or P25662 for Tubing size.
4	Tub or Shower Fittings: a. Brass or plastic tub drain overflow fittings or b. 2" PVC pipe extension up into a precast shower drain joint.

*Component bearing the Warnock Hersey Certification Mark