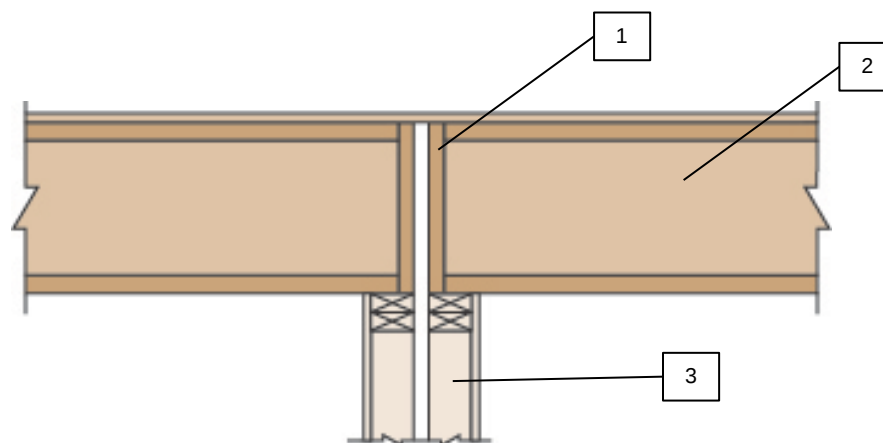

Weyerhaeuser NR Company
Design No. WNR/RB 60-01
Rim Board
Weyerhaeuser Rim Board, TJ® Rim Board, and TimberStrand® LSL
ASTM E119, CAN/ULC S101
Rating: 1 Hour or 45 Minutes, Non-Load Bearing



1. CERTIFIED MANUFACTURER:

Weyerhaeuser NR Company

CERTIFIED PRODUCT: Rim Board

CERTIFIED MODEL: Weyerhaeuser Rim Board, TJ® Rim Board, and TimberStrand® LSL

Min. 1-1/8 in. thick rim board installed in accordance with the manufacturer's published installation instructions. Rim board only supporting limited roof level application dead load.

2. ROOF/CEILING: Ceiling not required.

Unrated roof/ceiling assembly with roof joists running parallel or perpendicular to the wall. Min. 1-3/4 in. I-joists bearing length required.

3. WALL: Fire-resistance rated wall construction.