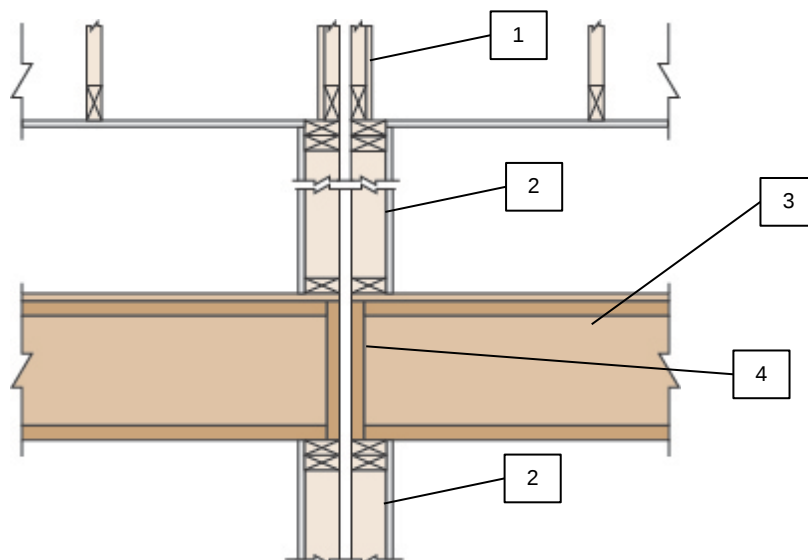

Weyerhaeuser NR Company
Design No. WNR/RB 60-02
Rim Board
Weyerhaeuser Rim Board, TJ® Rim Board, and TimberStrand® LSL
ASTM E119, CAN/ULC S101
Rating: 1 Hour or 45 Minutes, Non-Load Bearing



- 1. ROOF/CEILING:** Roof truss or joist running parallel to wall.
- 2. WALL:** Fire-resistance rated wall construction.
- 3. FLOOR/CEILING:** Ceiling not required. Unrated floor/ceiling assembly with floor joists running parallel or perpendicular to the wall. Min. 1-3/4 in. I-joists bearing length required.

- 4. CERTIFIED MANUFACTURER:**
Weyerhaeuser NR Company

CERTIFIED PRODUCT: Rim Board

CERTIFIED MODEL: Weyerhaeuser Rim Board, TJ® Rim Board, and TimberStrand® LSL

Min. 1-1/8 in. thick rim board installed in accordance with the manufacturer's published installation instructions. Rim board only supporting limited dead load from wall above.